



Mini F722 HD Pro

20x20mm

BetaFlight Target: SKYSTARSF7HDP R0
INAV Target: SKYSTARSF722HDP R0

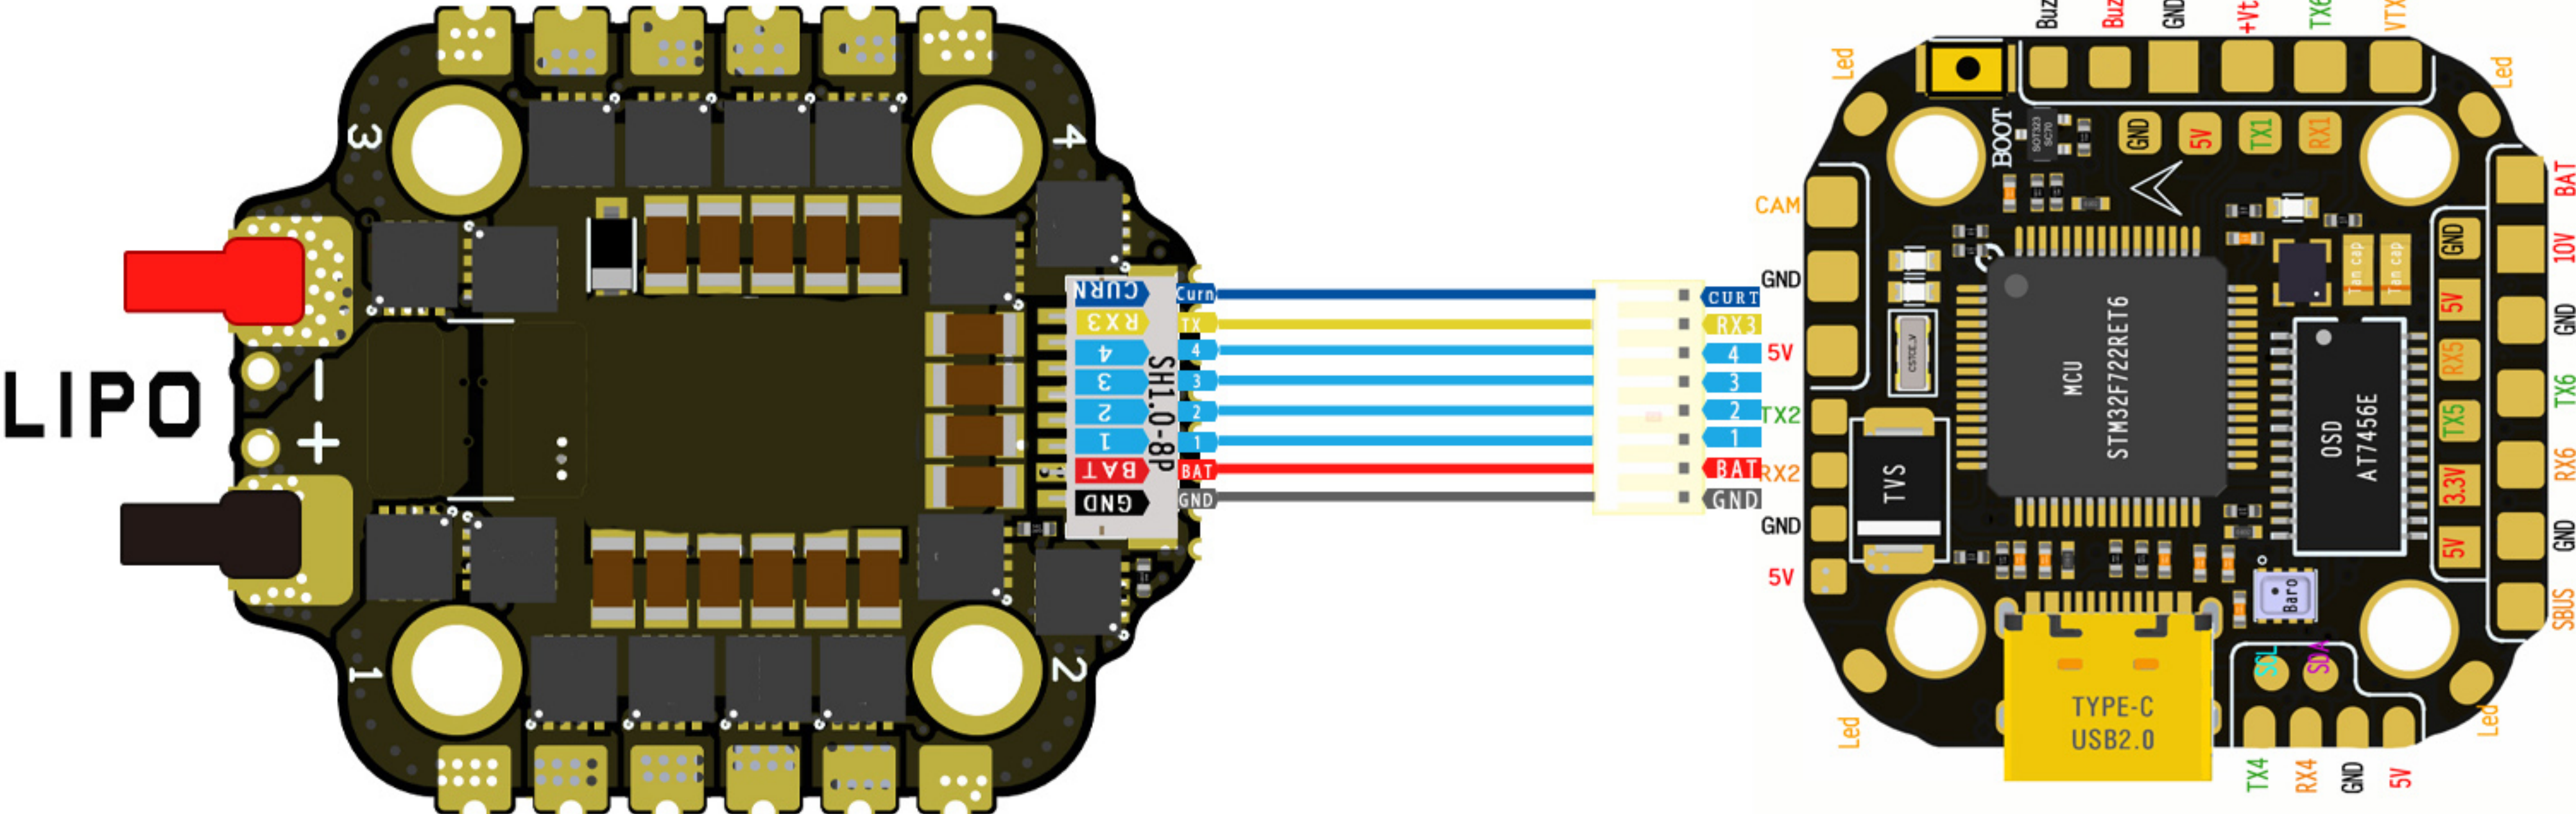





The Uart Port List:
UART1 Receivers
UART2 Vacancy
UART3 ESC TELE
UART4 Vacancy
UART5 Vaxancy
UART6 DJI FPV/VTX

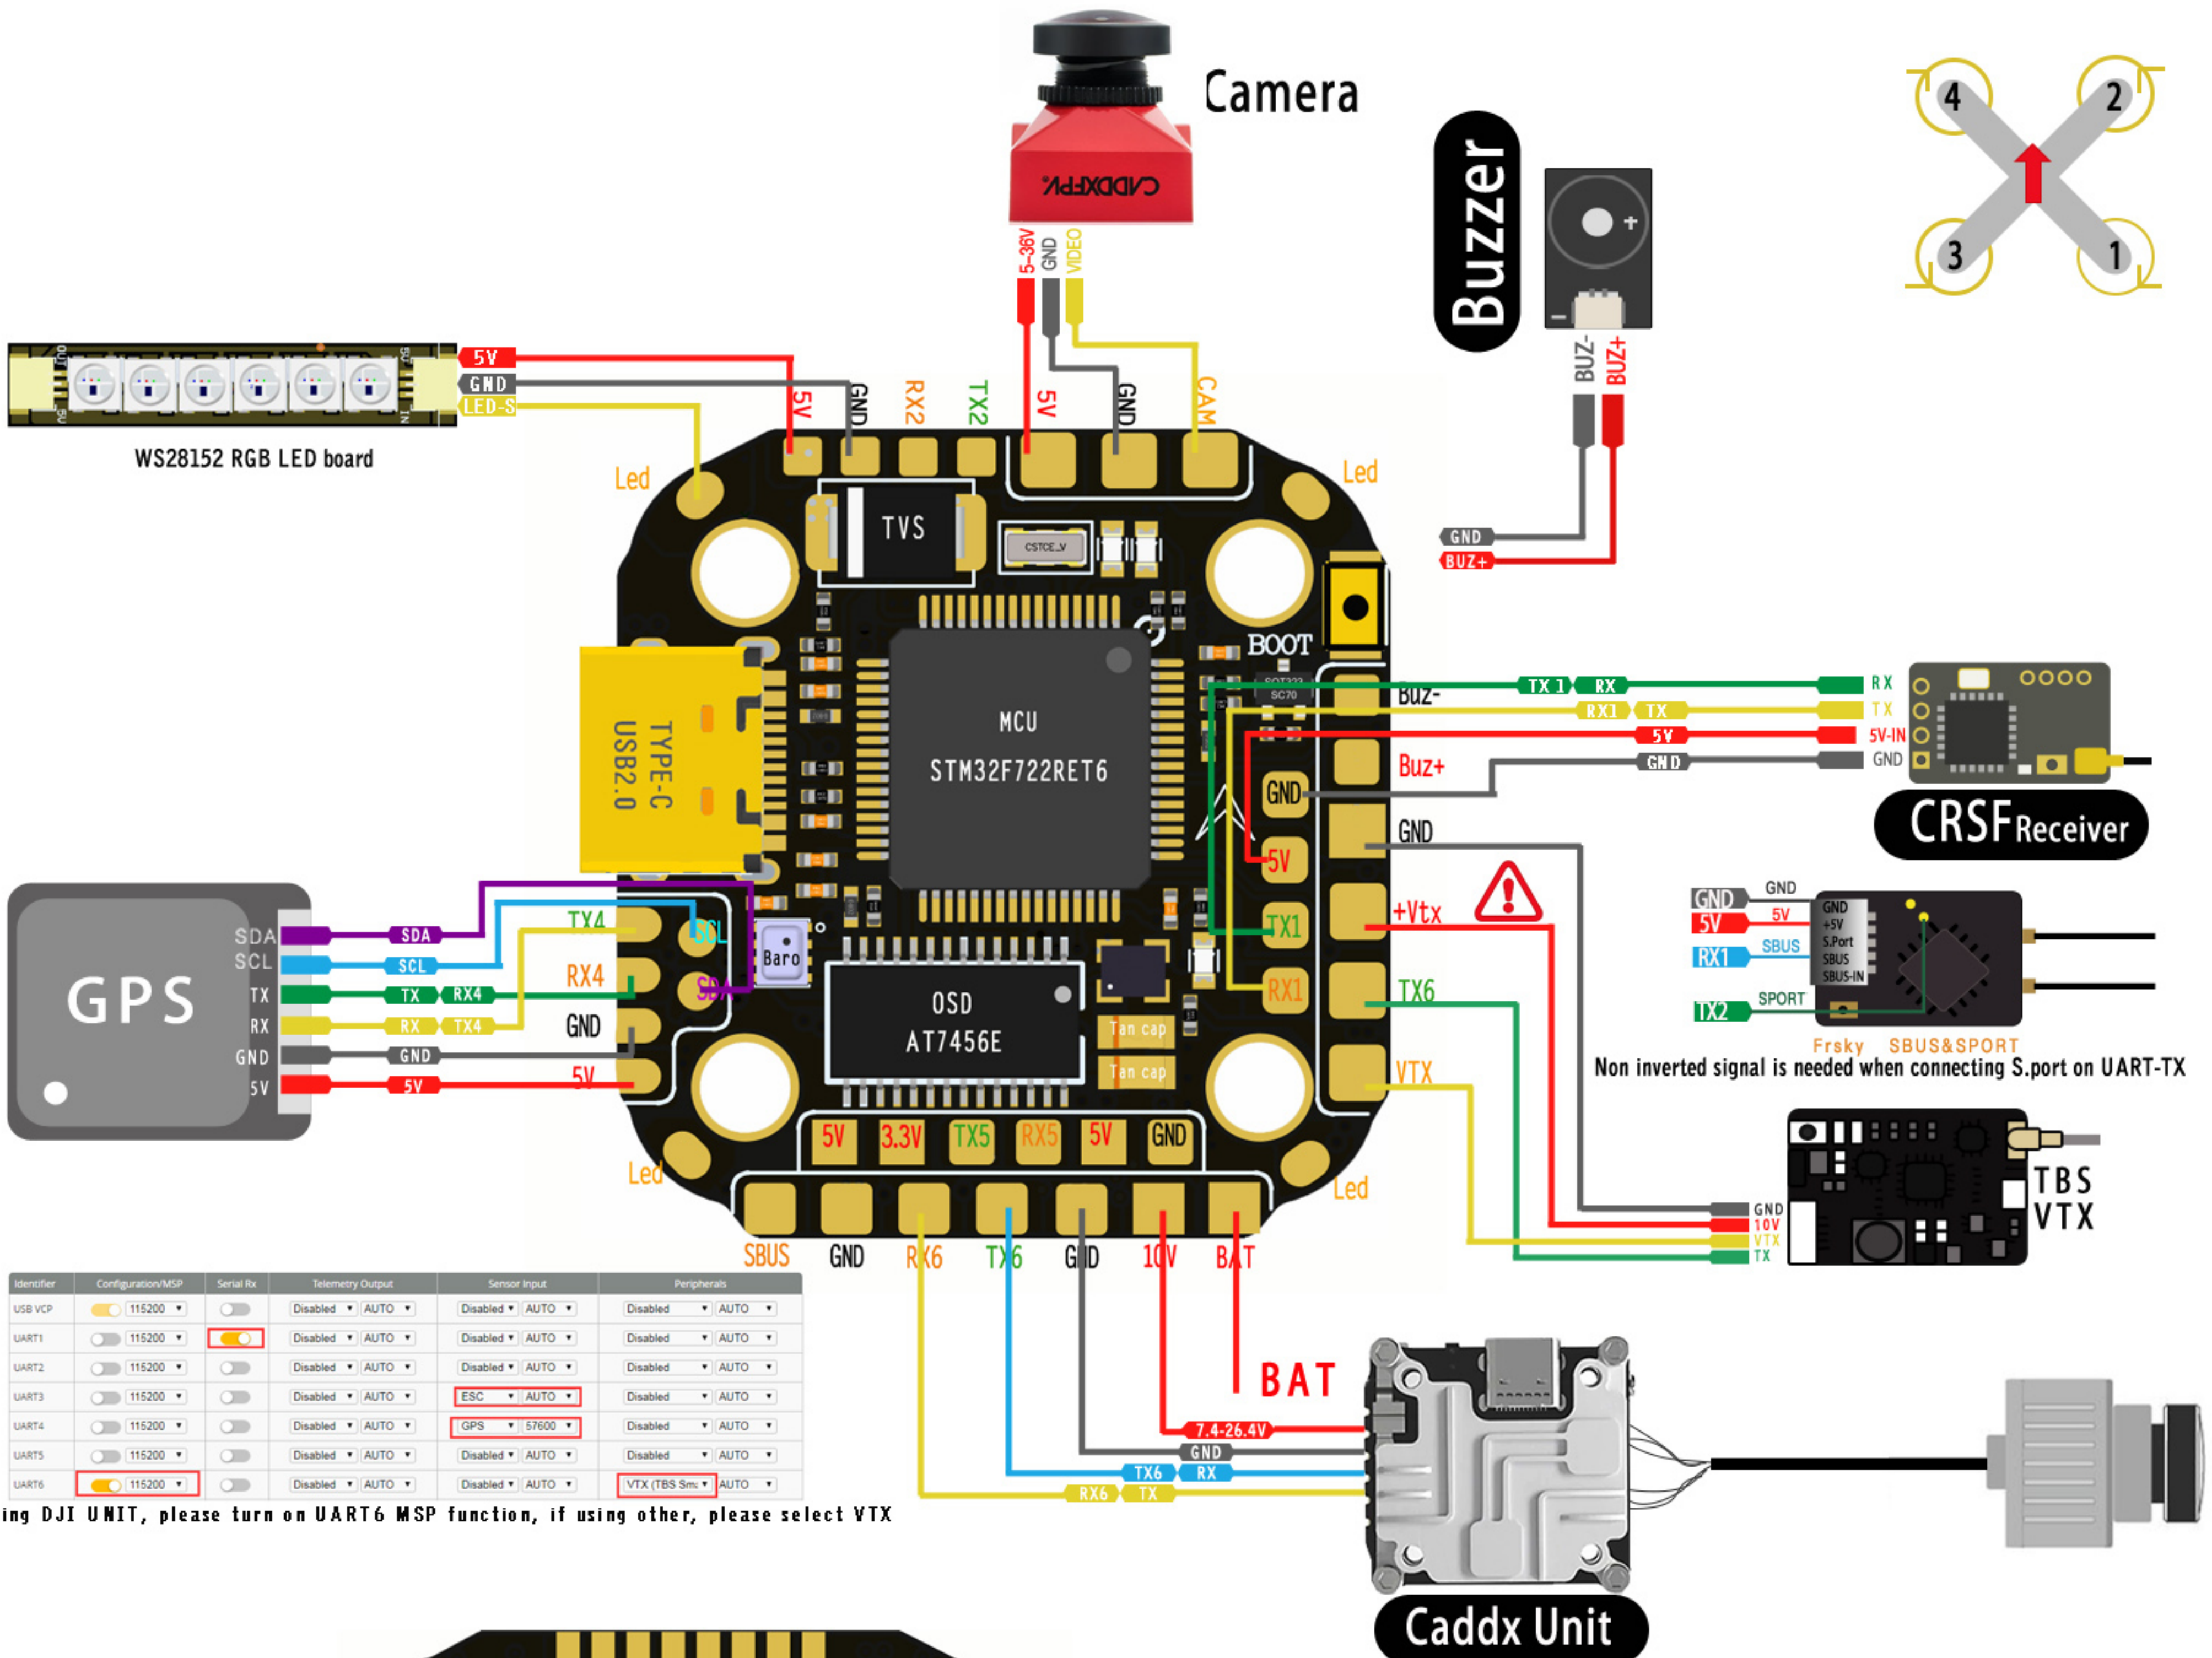

Identifier	Configuration/MSP	Serial No.	Telemetry Output	Sensor Input	Peripherals
USB VCP	115200		Disabled	AUTO	Disabled
UART1	115200		Disabled	AUTO	Disabled
UART2	115200		Disabled	AUTO	Disabled
UART3	115200		Disabled	AUTO	Disabled
UART4	115200		Disabled	AUTO	Disabled
UART5	115200		Disabled	AUTO	Disabled
UART6	115200		Disabled	AUTO	Disabled

If using DJI UNIT, please turn on UART6 MSP function, if using other, please select VTX

Use Pit mode for VTX
Use 10V for +VTX

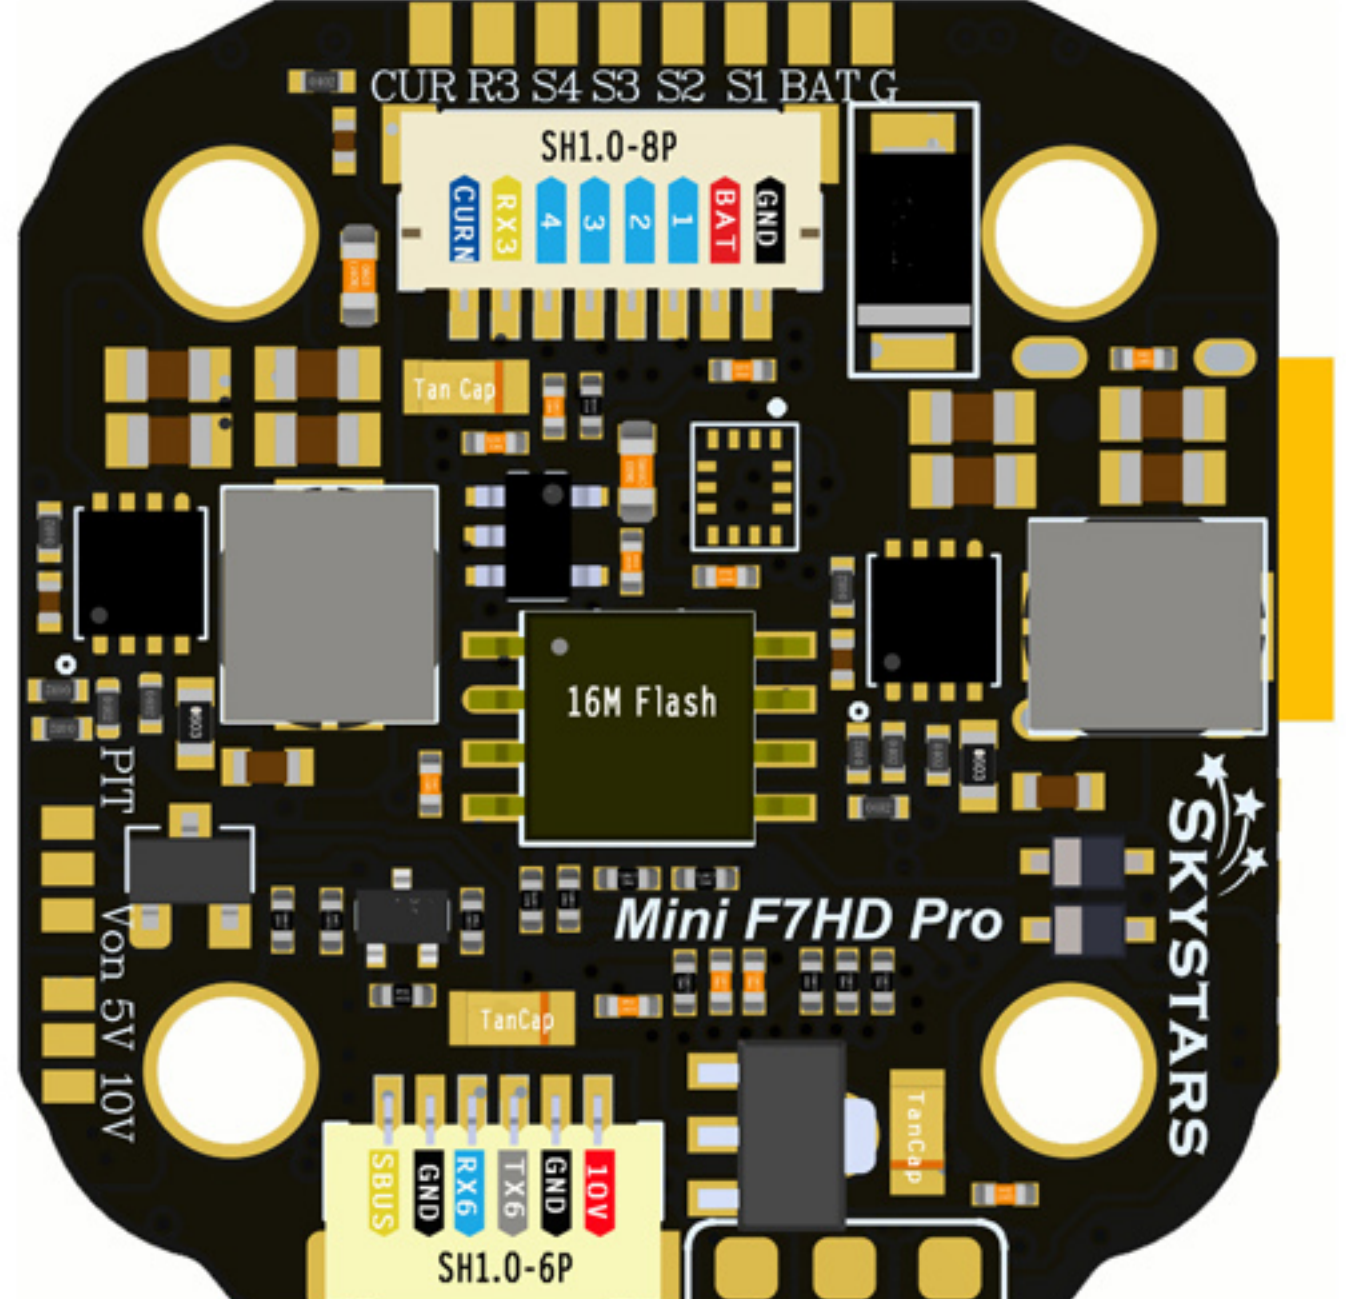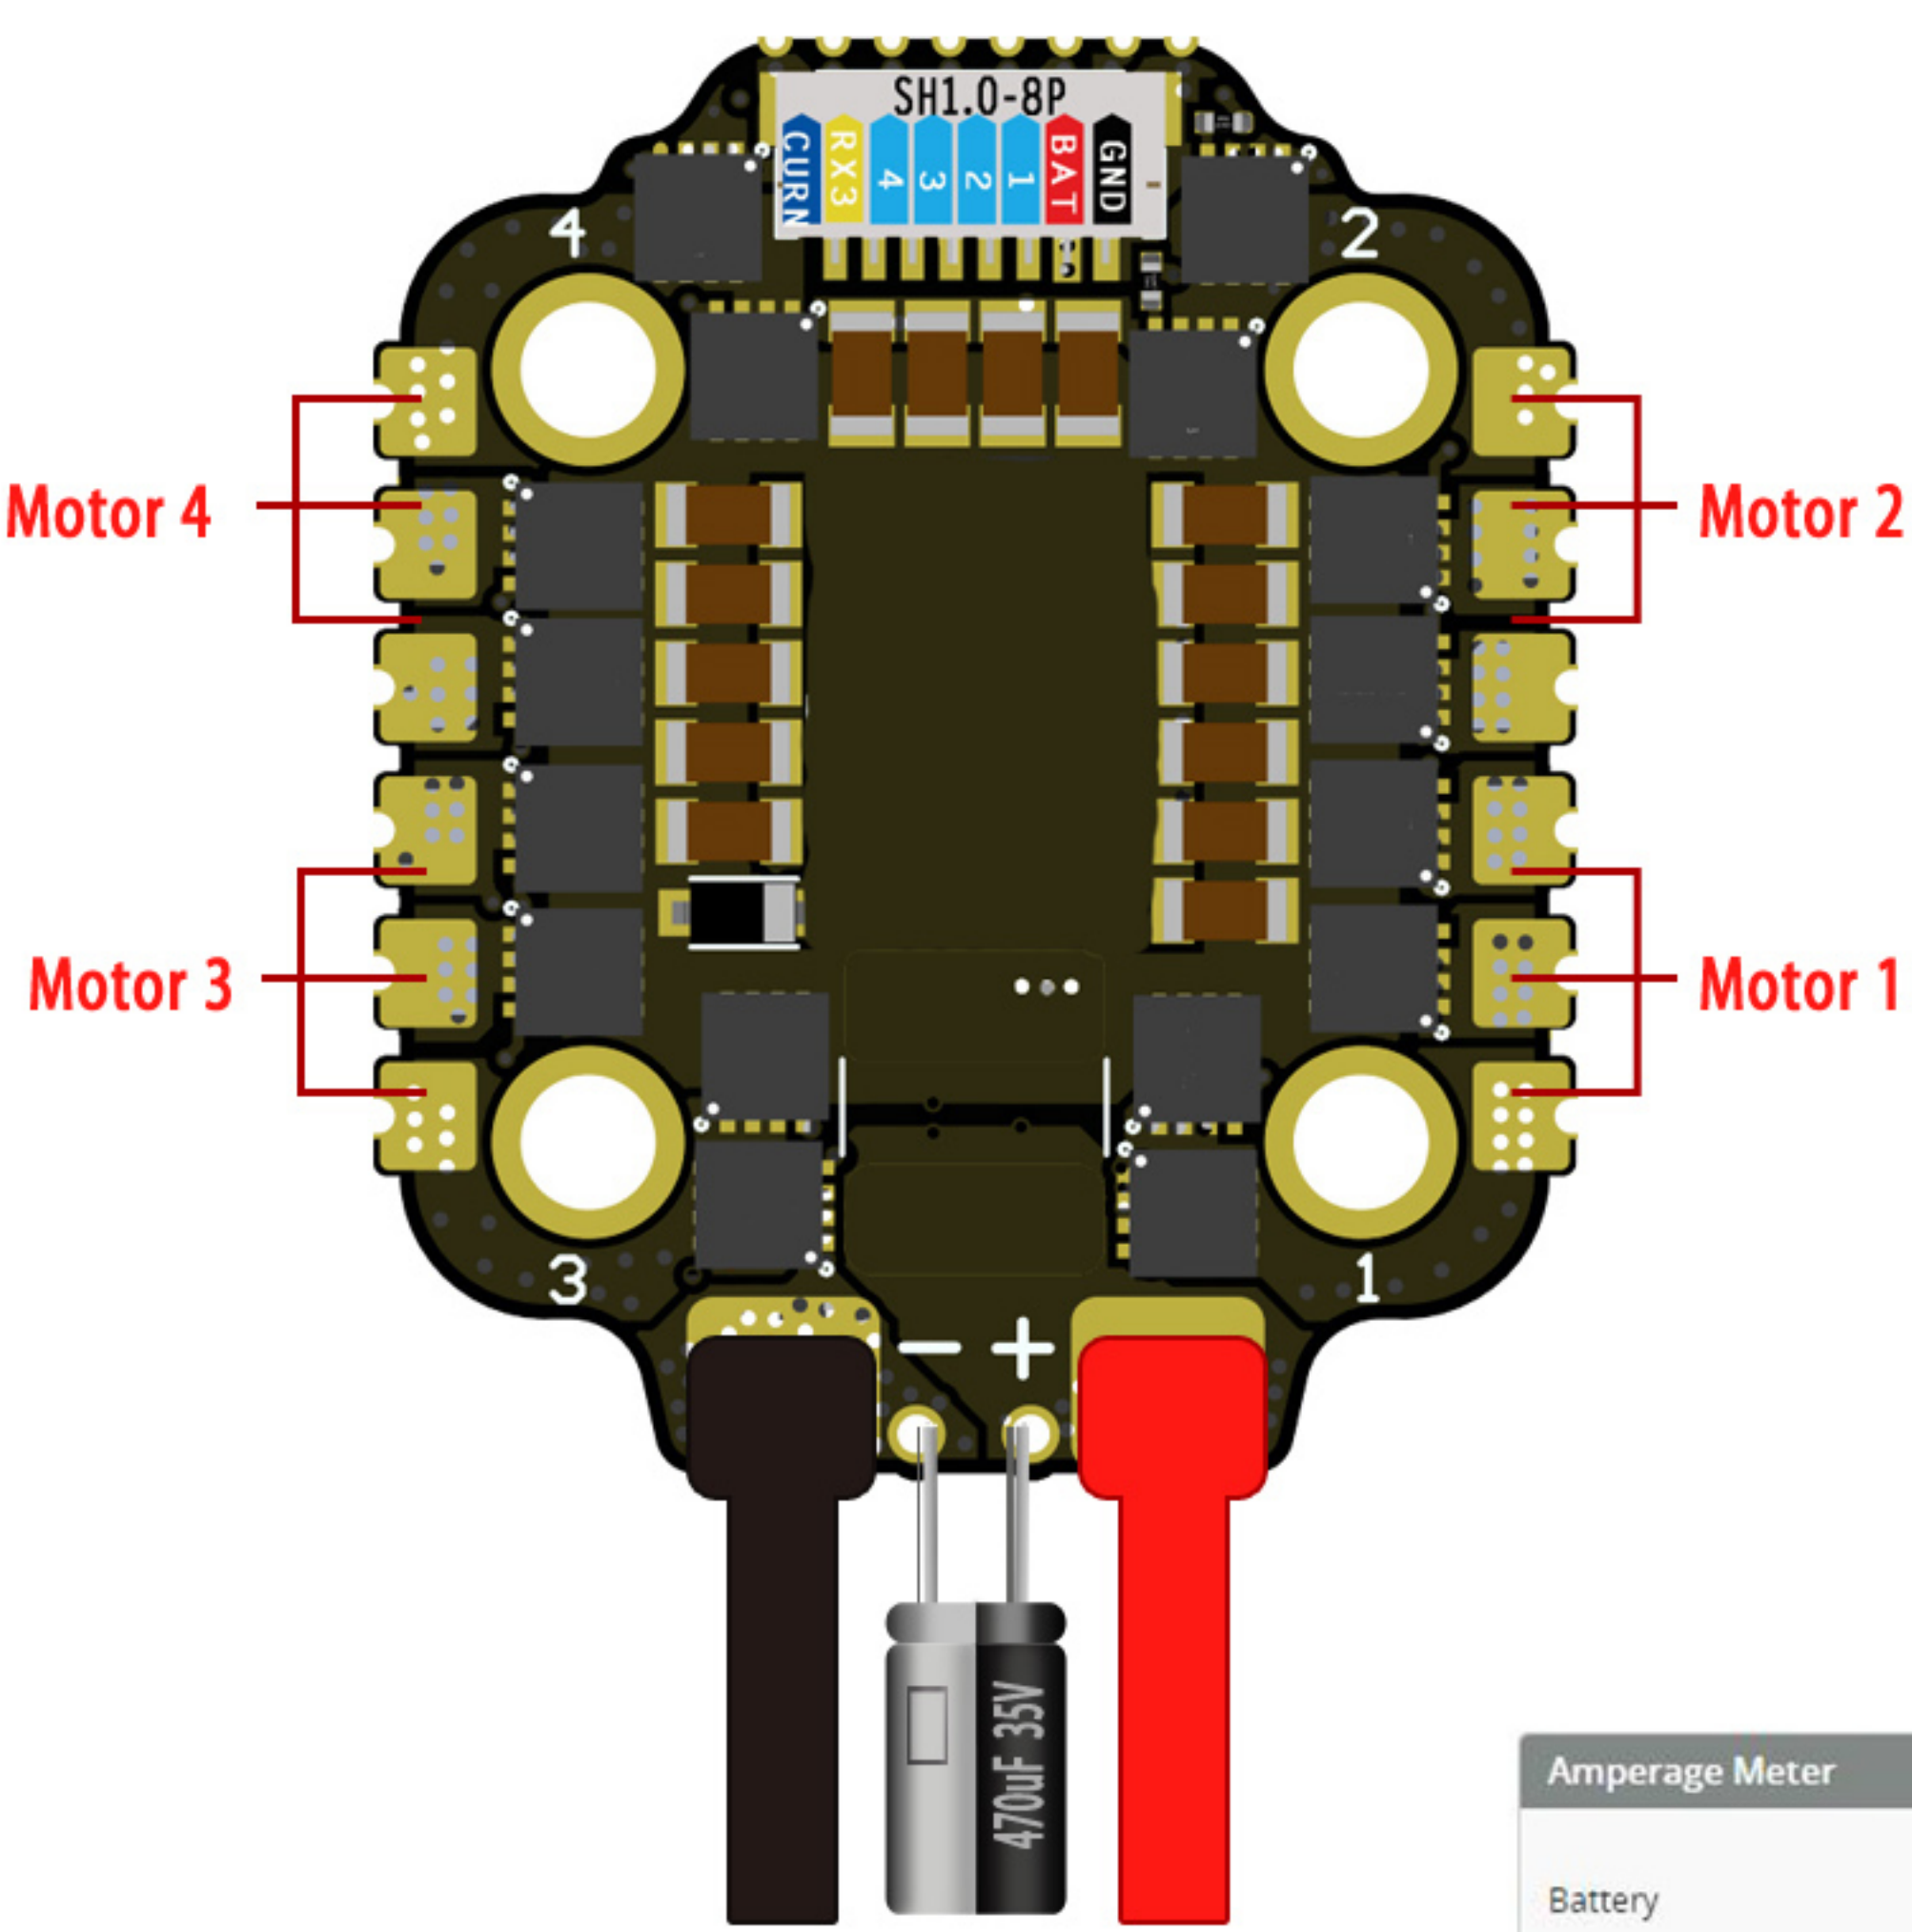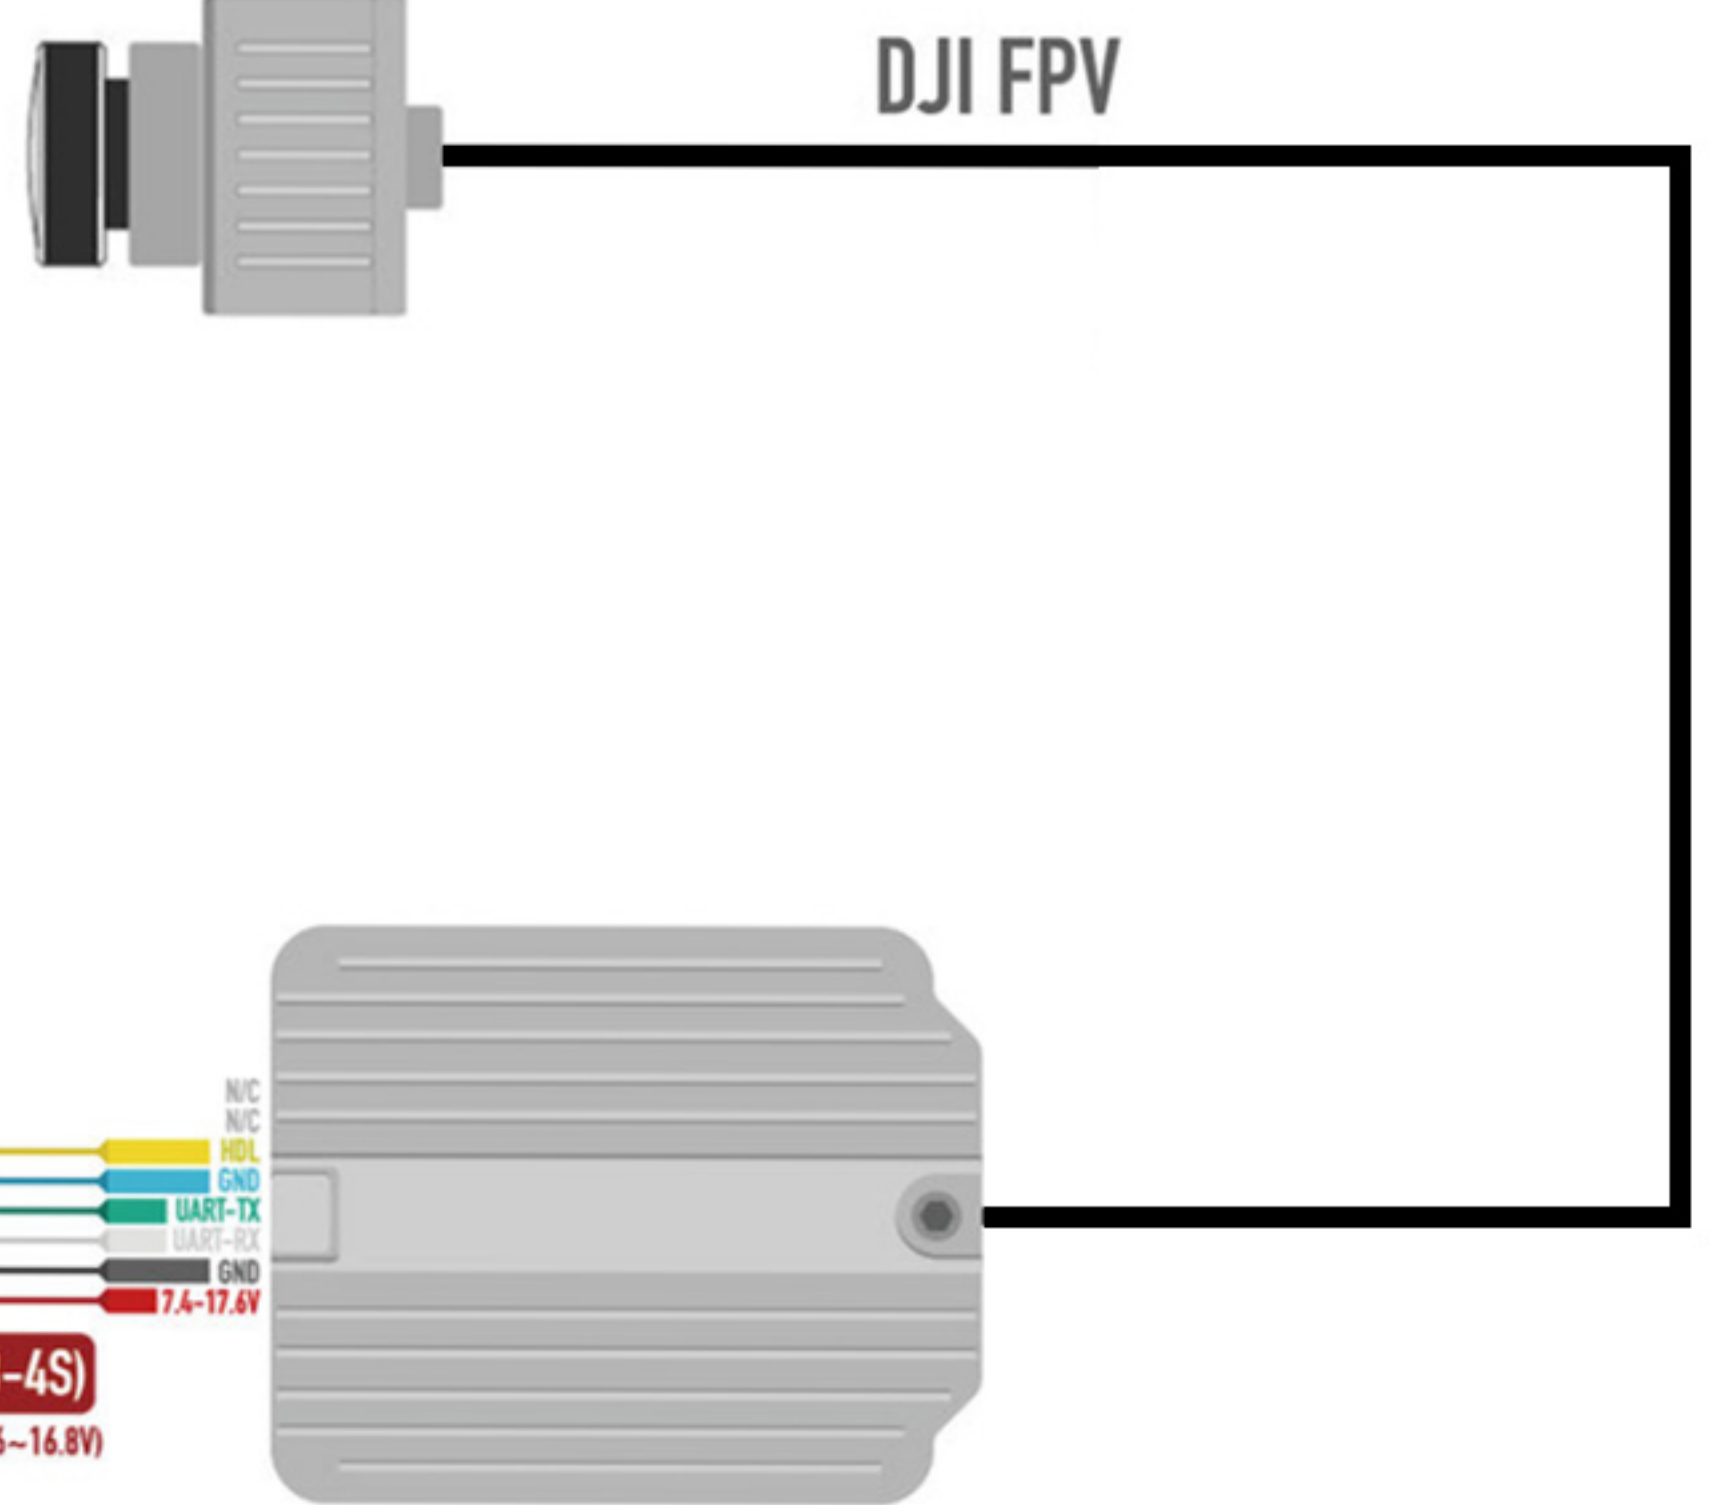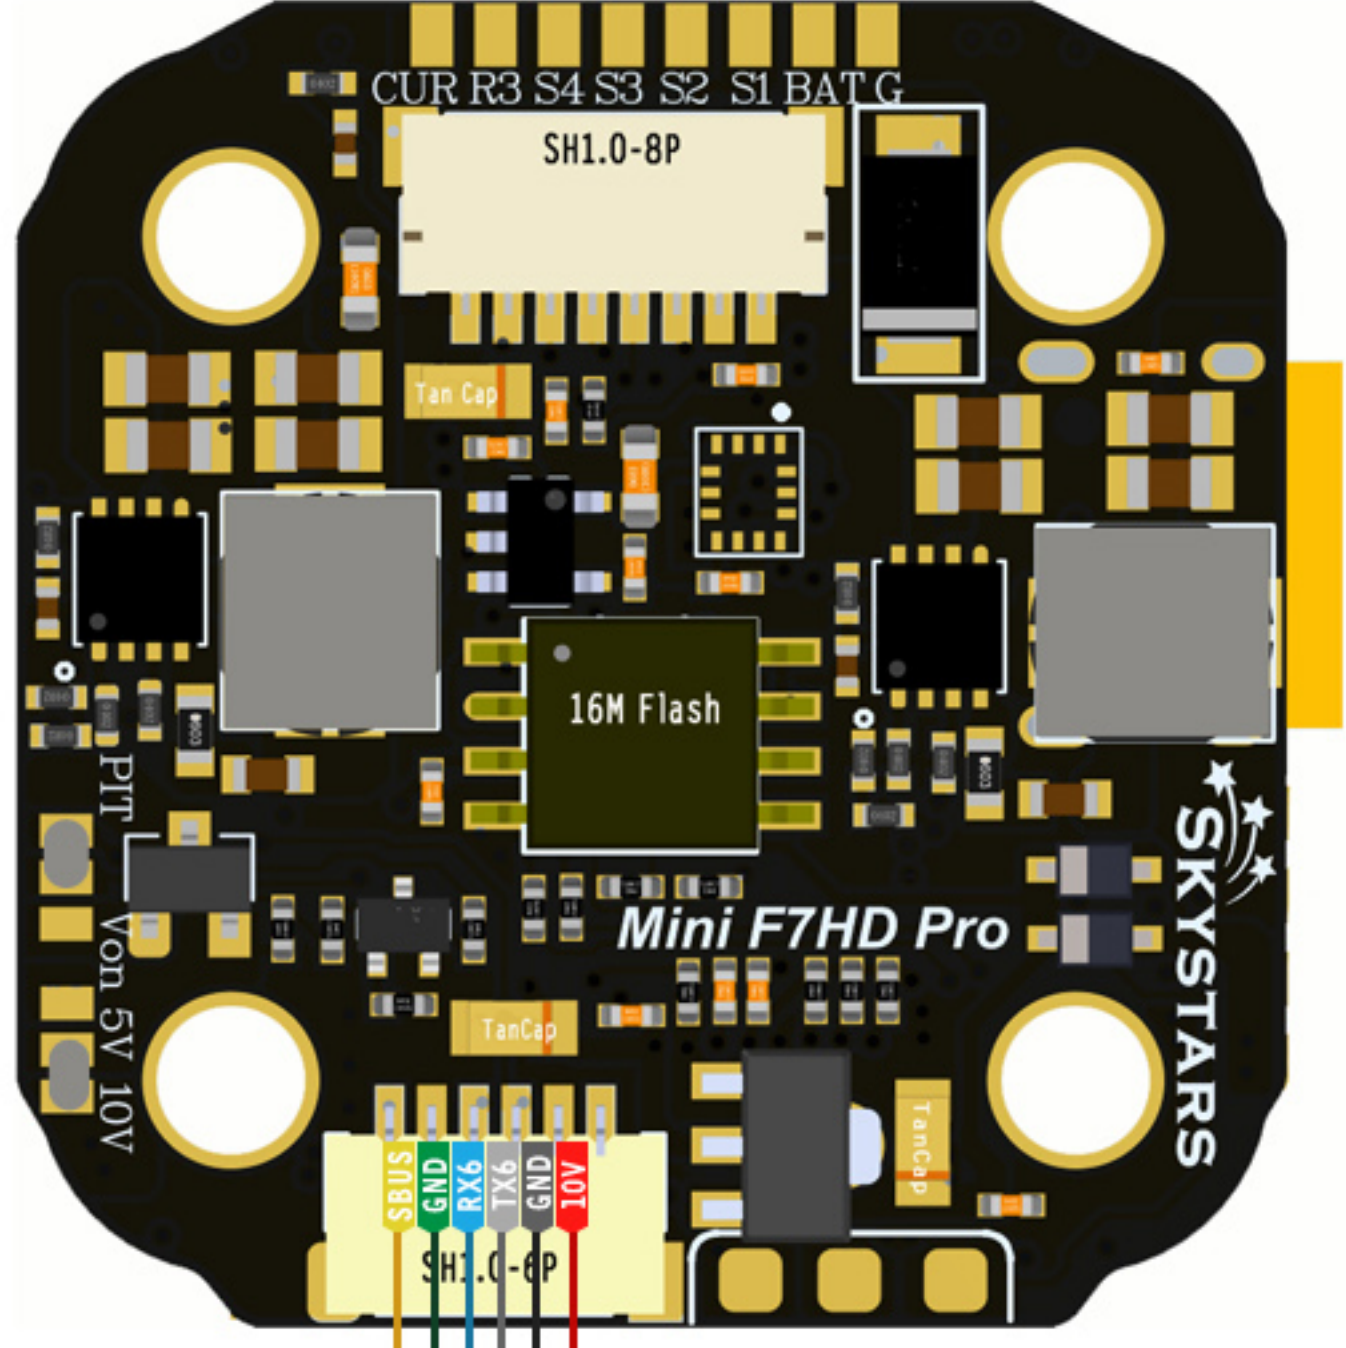

PLEASE USE LOW ESR CAPACITOR SUPPLIED!